


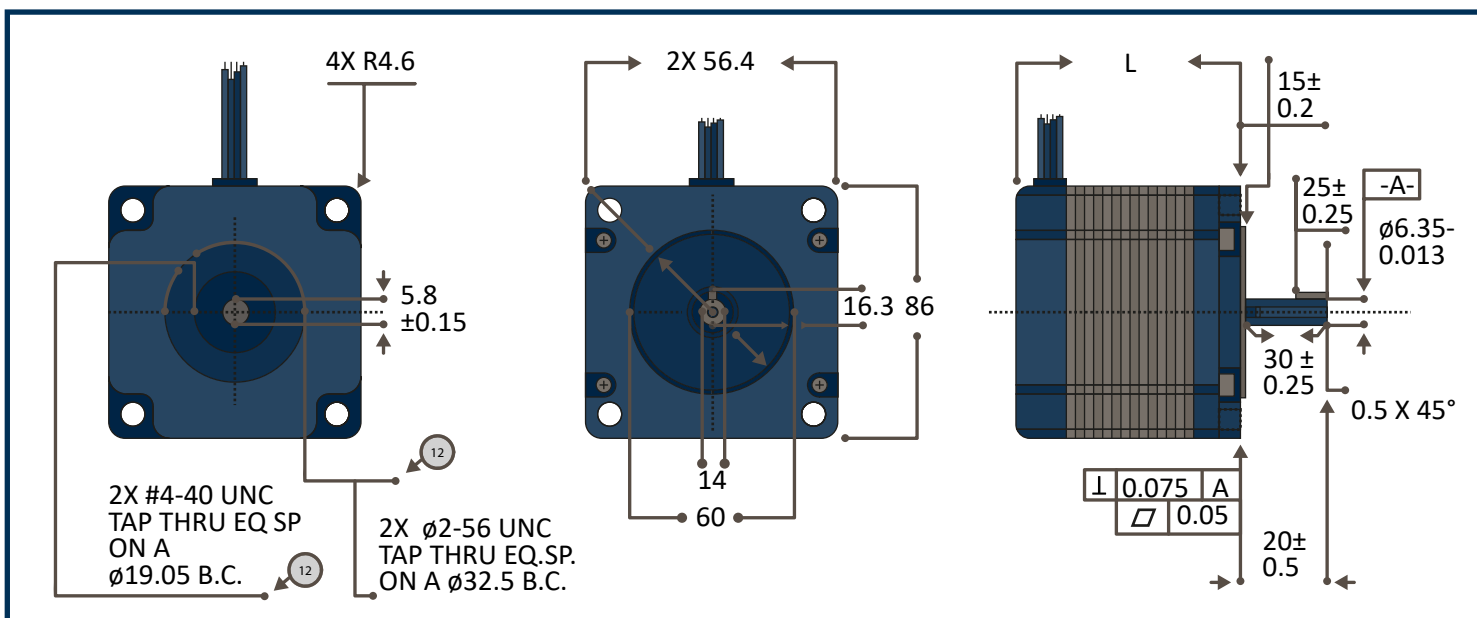

ESPECIFICACIONES FÍSICAS

TORQUE	PESO	LARGO	ALTO	ANCHO	LONG/CABLE	TIPO
1.2Nm	0.70 kg	60.5mm	55mm	55mm	320mm	Bipolar
2.2Nm	1.10 kg	81mm	55mm	55mm	510mm	Bipolar
2.8Nm	1.50 kg	110mm	55mm	55mm	530mm	Bipolar
3.5Nm	1.60 kg	180mm	55mm	55mm	550mm	Bipolar

ESPECIFICACIONES ELÉCTRICAS

TORQUE	ANGULO /PASO	VOLTAJE	PAR DE RETENCIÓN	CORRIENTE NOMINAL	RESISTENCIA DE FASE	INDUCTANCIA
1.2Nm	1.8°	24v	170 oz-in	3.0A	0.9 ohms	2.6mH
2.2Nm	1.8°	36v	315 oz-in	3.0A	1.2 ohms	4.0mH
2.8Nm	1.8°	36v	396 oz-in	3.0A	2.2 ohms	6 0mH
3.5Nm	1.8°	36v	500 oz-in	3.0A	2.5 ohms	8 0mH

POLO

DIAGRAMA DE CONEXIONES

A	■	Negro	■	Rojo
A -	■	Verde	■	Verde
B	■	Rojo	■	Amarillo
B -	■	Azul	■	Azul

CONTACTANOS:

GDL
(33) 31 610 538


QRO
(44) 61 830 482



¡Escanear el código para ver nuestro tutorial de instalación!




MODELO 1.2Nm

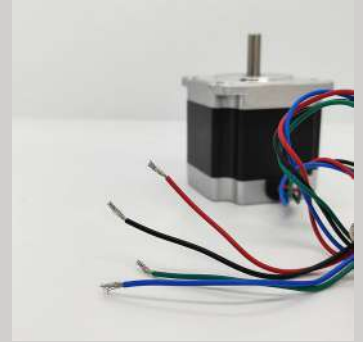

MODELO 2.2Nm



MODELO 2.8Nm

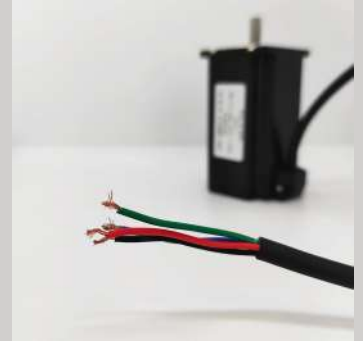

MODELO 3.5Nm

